
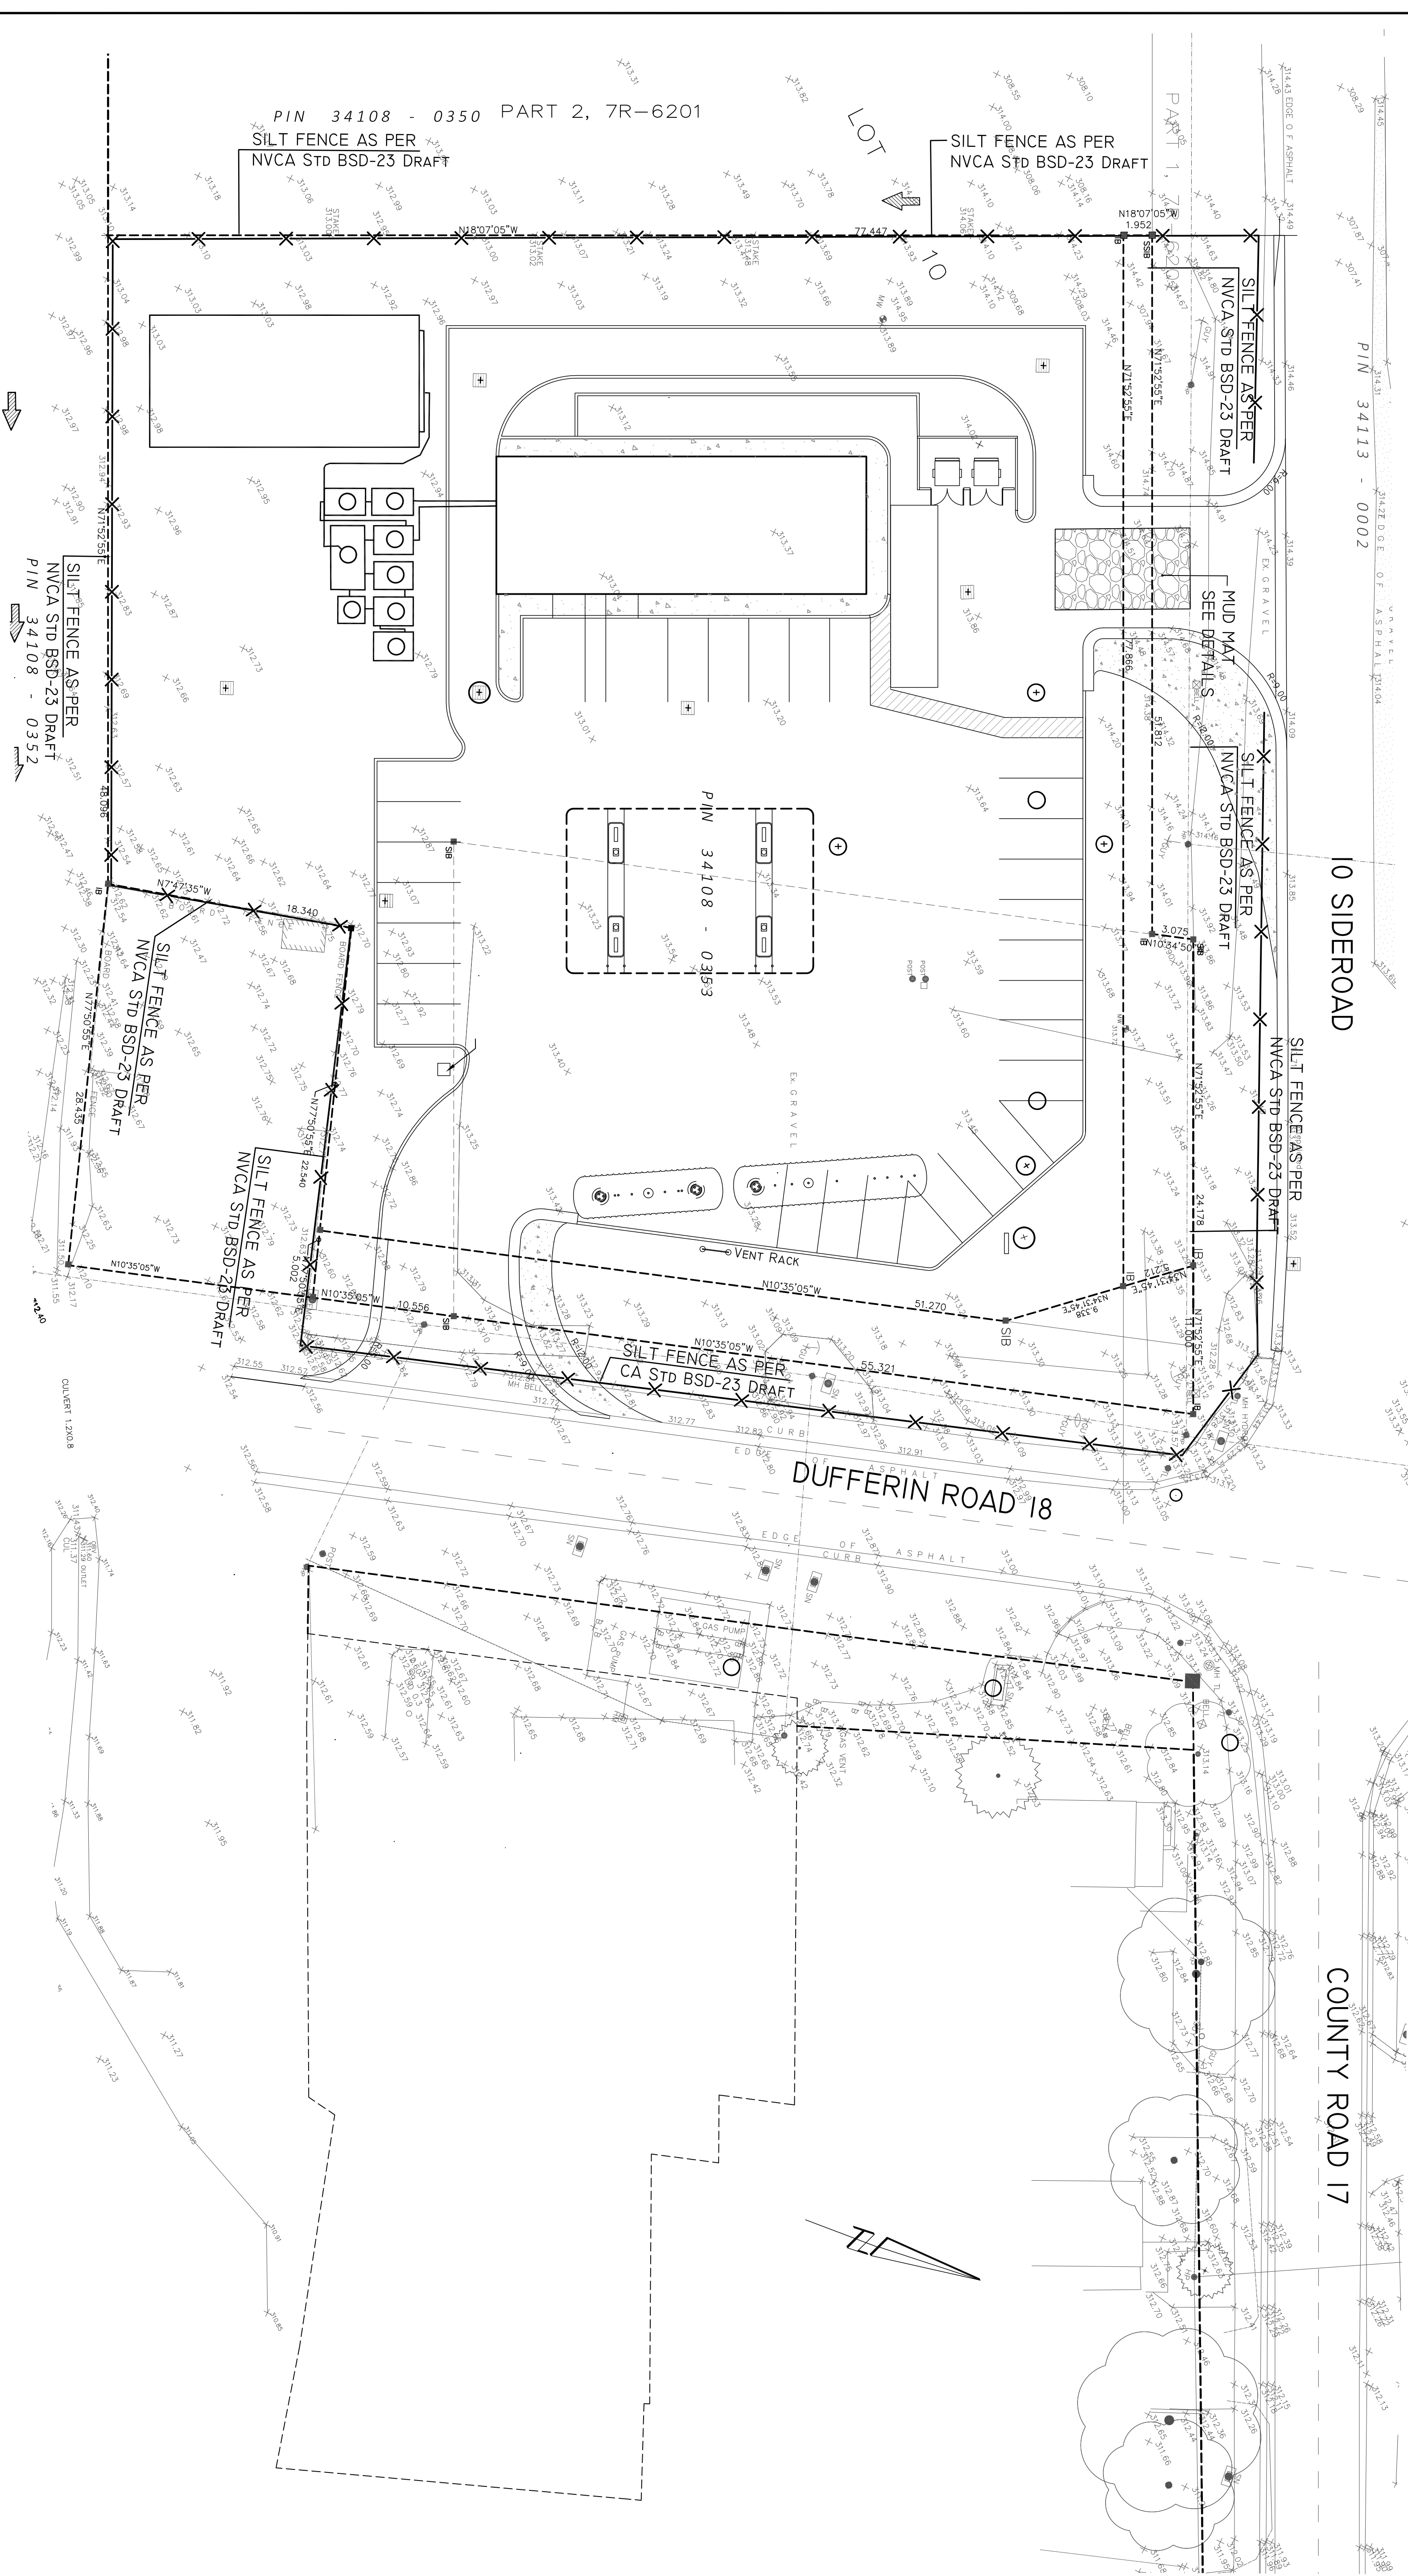
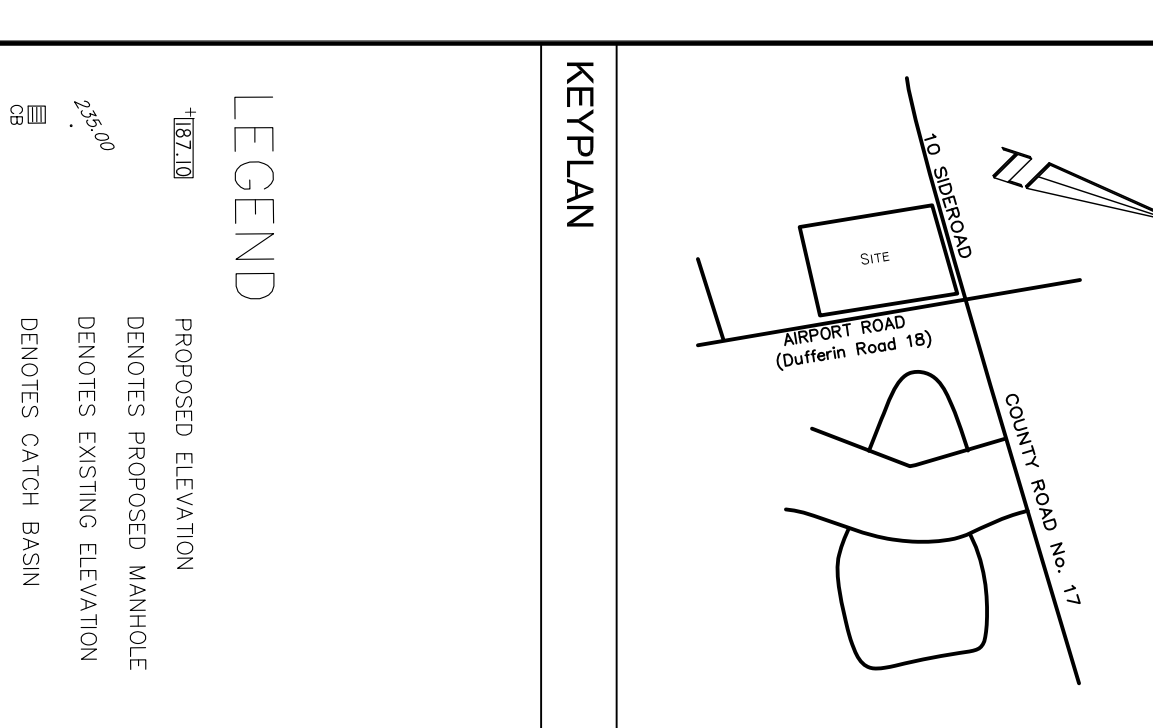


- Erosion and Sediment Control**
- All sediment and siltation control measures shall be implemented by the contractor prior to the commencement of site grading works, to the satisfaction of the Township of Mulmur
 - If construction is interrupted for more than 30 days, stripped and bare areas shall be stabilized by seeding.
 - The sediment control devices shall be inspected after each significant rainfall, and/or weekly.
 - The sediment control measures shall be repaired, or replaced as necessary, or as required by the Township of Mulmur and Engineer.
 - The contractor shall construct an access driveway to the satisfaction of the town. A mud tracking mat shall be included in such works.
 - Municipal Roads must be kept clean of mud and dirt as required by the Township of Mulmur a silt fence must be installed around the perimeter of the property.

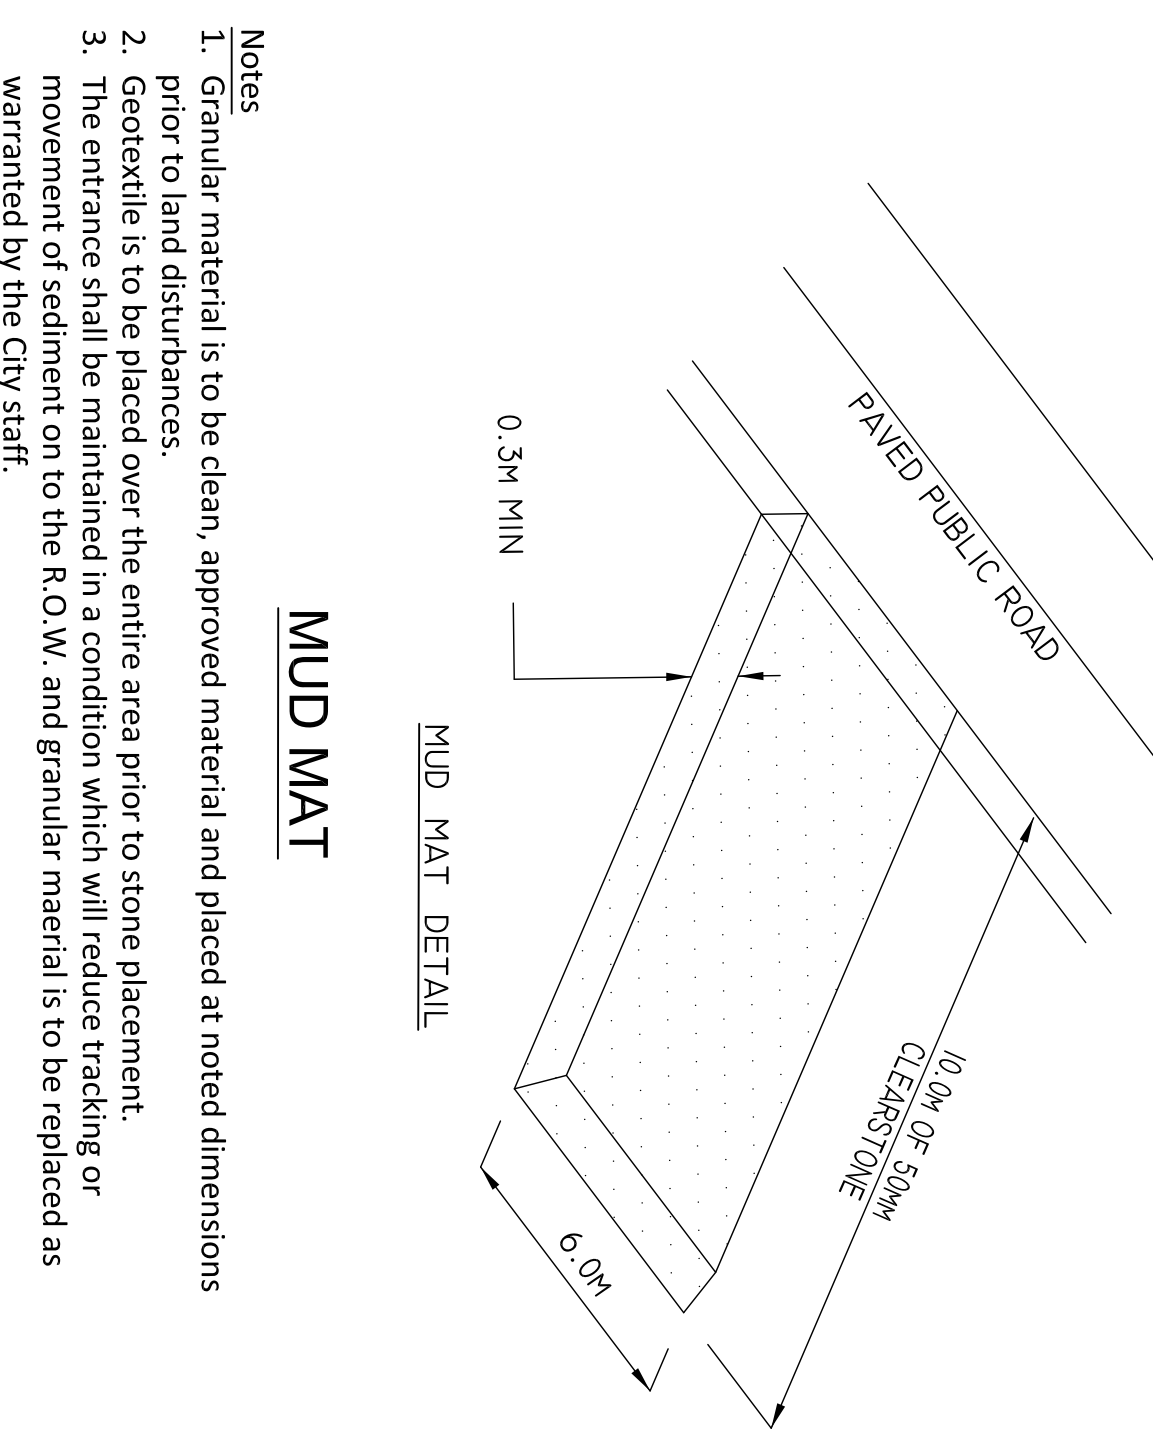

No.	Revisions	Date
1	1st Submission comments	2017 01 11
2	2nd Submission comments	2017 06 23
3	3rd Submission comments	2017 09 10
4	4th Submission comments	2017 11 17
5	5th Submission comments	2017 12 24
6	6th Submission comments	2018 06 06
7	7th Submission comments	2018 07 28

RAM ENGINEERING INC
 1192 White Clover Way
 Mississauga On, L5V1K8
 Pht: 905 677 1215
 Email: richmum@rameng.com

LICENSED PROFESSIONAL ENGINEER
 R. DHARADIAL
 PROVINCE OF ONTARIO
 JUL 28 2008

PROJECT: GAS BAR & CONVENIENCE STORE
 AIRPORT RD
 MULMUR, ONTARIO

DRAWING NAME: EROSION & SEDIMENT CONTROL PLAN

ORDERED BY: R.D.
 PROJECT DATE: 2017 07 13
 SCALE: 1:250
 DRAWING NO: ERC